


XQY-PS2-DC/6-NE

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	DC ~ 6000 MHz
插入损耗 Insertion Loss	≤ 7.5 dB
输入驻波 Input Port VSWR	Typ.1.11 / Max.1.25
输出驻波 Output Port VSWR	Typ.1.10 / Max.1.25
隔离度 Isolation	Min.5.6dB
幅度平衡 Amplitude Balance	± 0.3dB
相位平衡 Phase Balance	±3°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	N-Female
工作功率 Power Rating	2 W
工作温度 Operation Temperature	-35°C ~ +75°C
表面处理 Surface Finishing	Sandblasting natural color conductive oxidation 喷砂本导
外形尺寸 Outline Dimensions	32*38*20 (mm)
重量 Weight	98 (g)

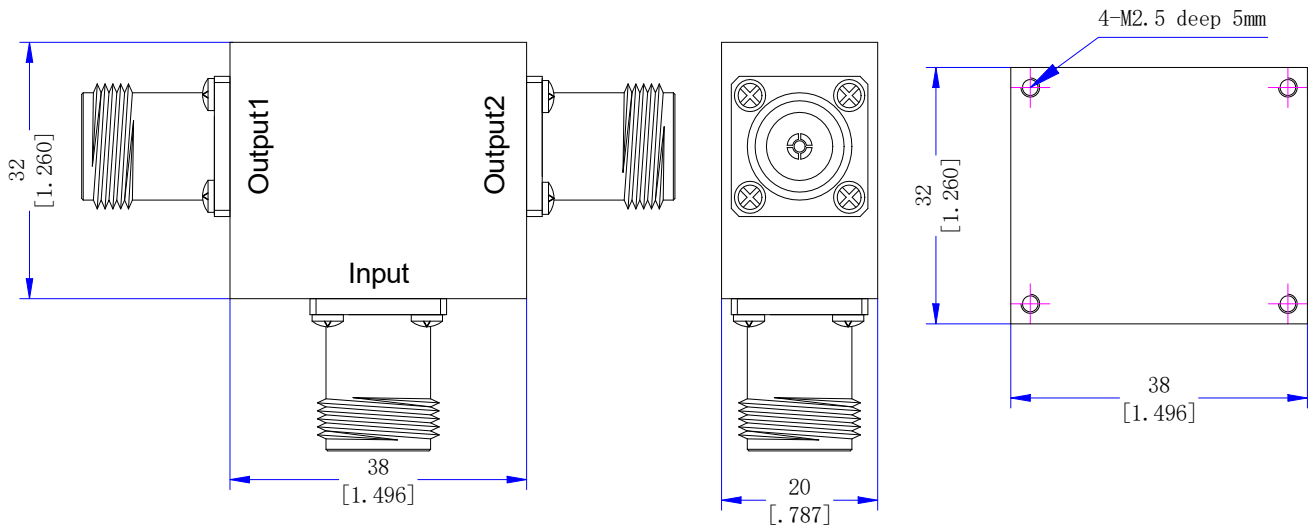

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)